



NS3 – GUI HELPER

Manual for Release v1.2.0

Abstract

The NS3-GUI Helper project presents a comprehensive manual designed to assist users in harnessing the power of NS3 (Network Simulator 3) through an intuitive graphical user interface (GUI).

Email us at: henilmistry74496@gmail.com

Henil Mistry

Email us at : henilmistry74496@gmail.com

1 CONTENTS

2	List of figures	0
3	Getting Started.....	1
3.1	Overview.....	1
3.1.1	Key features	1
3.1.2	Benefits.....	1
3.1.3	Target Audience	1
3.1.4	Capability.....	1
3.2	Note.....	1
4	Basic Navigation	2
4.1	Exploring Main Menu	2
4.1.1	File Menu.....	2
4.1.2	Settings Menu (*NEW).....	3
4.2	Exploring the layout	7
4.3	Exploring the Main Panel	8
4.3.1	Exploring Tools Section	8
4.3.2	Exploring Configure Topology Section	13
4.3.3	Exploring the Utilities	15
4.3.4	Exploring Overview Tab.....	16

2 LIST OF FIGURES

Figure 1 - Main Menu	2
Figure 2 - Output configuration Dialog Box.....	2
Figure 3 – New Settings Menu	3
Figure 4 - Default Link Configuration Dialog Box.....	3
Figure 5 - Before and After clicking on "show default links"	4
Figure 6 - Showing Default Links to Main panel	4
Figure 7 - Default Network Dialog Box	5
Figure 8 - Default Wi-Fi Link Configuration Dialog Box.....	6
Figure 9 - Layout of the Application	7
Figure 10 - Selection of node tool.....	8
Figure 11 - Icon of node tool	8
Figure 12 - selection of P2P Link Tool.....	9
Figure 13 - icon for P2P Link Tool	9
Figure 14 - Configure Connection Dialog Box	9
Figure 15 - Selection of CSMA Link Tool.....	10
Figure 16 - Icon for CSMA Link Tool	10
Figure 17 - Selection of View Tool.....	11
Figure 18 - Icon of view tool	11
Figure 19 - Selection of Wi-Fi Connection Tool	12
Figure 20 - Icon of Wi-Fi Connection tool	12
Figure 21 - Create Link Dialog Box	13
Figure 22 - Create a network dialog box.....	13
Figure 23 - Server Configuration Dialog Box	14
Figure 24 - Client Configuration Dialog Box	14
Figure 25 - Utility Section from the Main Panel.....	15
Figure 26 - Overview tab from the Main Panel	16

3 GETTING STARTED

3.1 OVERVIEW

NS-3 GUI Helper is an innovative software tool designed to streamline the process of network simulation using NS-3 (Network Simulator 3) by providing an intuitive graphical user interface (GUI). NS-3 is renowned for its accuracy and flexibility in modelling complex network scenarios, but its command-line interface can present challenges for novice users. NS-3 GUI Helper addresses this issue by offering a user-friendly interface that simplifies simulation setup, configuration, and visualization in early stage of learning process for NS-3.

Whether you are a student, professor or a master of a NS-3 this software might help you to write efficient code, minimal error and it can save your time for writing code for basic scenarios.

3.1.1 Key features

1. Graphical Interface
2. Simulations Design Tool
3. Visualization Capabilities

3.1.2 Benefits

1. Accessibility
2. Efficiency
3. Ease of use

3.1.3 Target Audience

NS-3 GUI Helper is ideal for students, researchers, network engineers, and professionals who need to design, simulate, and analyse network scenarios using NS-3. It caters to users who may be unfamiliar with the intricacies of NS-3's command-line interface and provides an accessible entry point to network simulation.

3.1.4 Capability

NS-3 GUI Helper is compatible with NS-3, a widely-used discrete-event network simulator, and supports various operating systems, including Windows, macOS, and Linux distributions.

3.2 NOTE

You must note that the images shown here, may be different because there are several changes that we have made in the overall look and feel (Theme) of the application. The content and the fields are not changed so, must look out for that.

4 BASIC NAVIGATION

4.1 EXPLORING MAIN MENU

You will be shown a step-by-step guide for accessing the Main Menu, also known as the menu bar, of this application.

4.1.1 File Menu

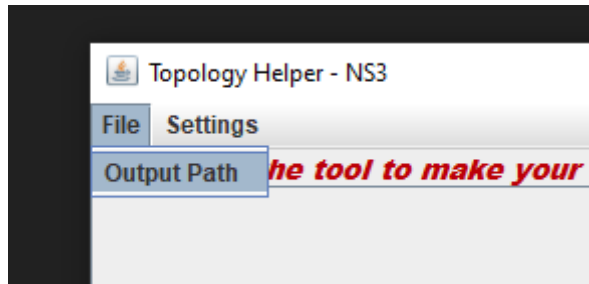


Figure 1 - Main Menu

In the menu bar, there are primarily two menus. We are currently exploring the "File" menu. This menu allows you to specify the file path where the code for the topology will be generated, as it serves as the main function of this application. Furthermore, you have the option to modify the name of the generated file.

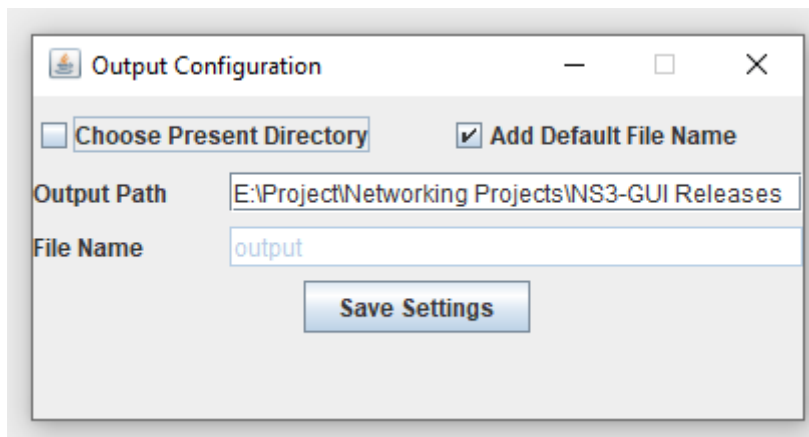


Figure 2 - Output configuration Dialog Box

After selecting "Output Path" from the "File" Menu, a dialog box (refer to Figure 2) will appear. Here, you can specify the output path and file name as discussed earlier. Additionally, if you prefer the default settings, you can check the checkbox provided. Finally, click the "Save Settings" button to save your chosen settings.

4.1.2 Settings Menu (*NEW)

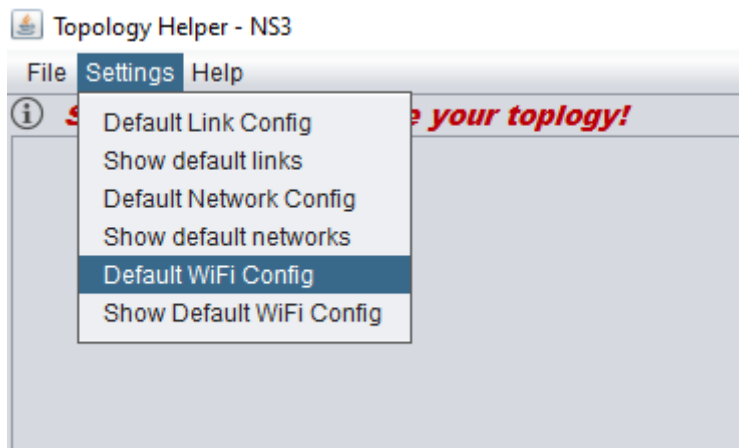


Figure 3 – New Settings Menu

The "Settings" menu provides convenient interaction with the application, primarily enabling you to save frequently used configurations. This functionality minimizes the number of clicks and time required to set up the application repeatedly.

4.1.2.1 Managing Default Links

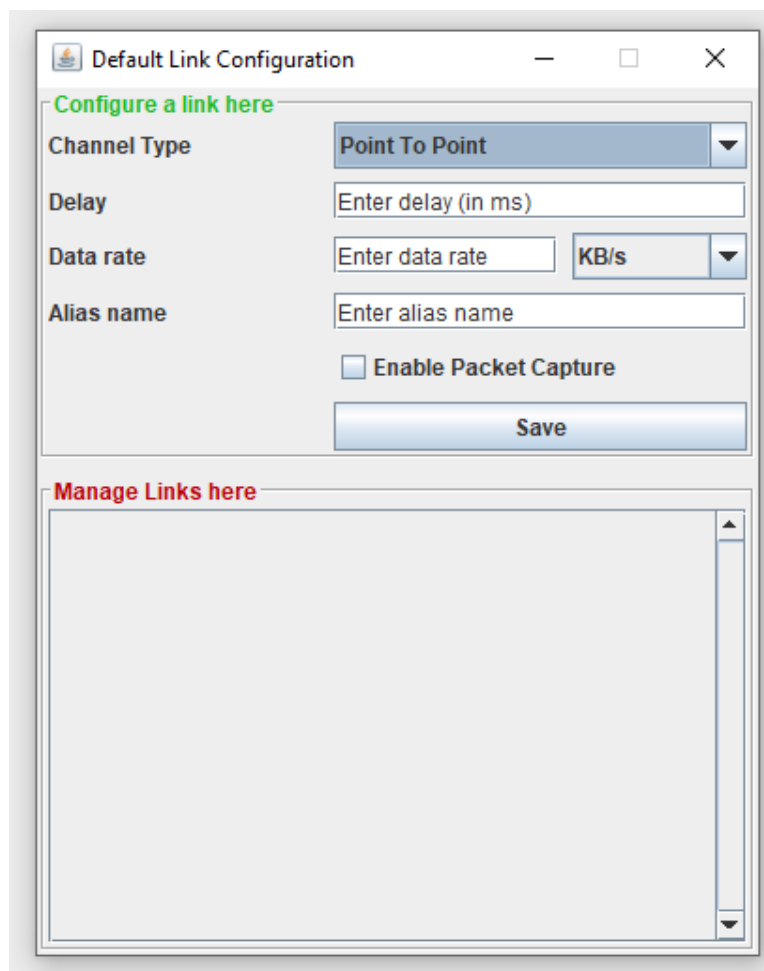


Figure 4 - Default Link Configuration Dialog Box

This dialog box (refer to Figure 4) facilitates the addition, editing, and deletion of default network links (channel) along with their configurations. It allows you to add links that you use frequently, thereby saving time on repetitive configuration tasks.

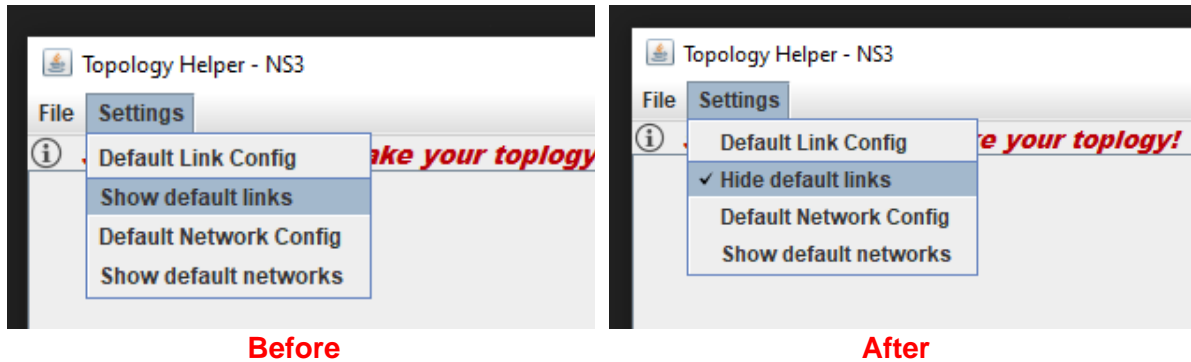


Figure 5 - Before and After clicking on "show default links"

You can then click on "show default links" (refer to Figure 5) to use the configured default links into your current topology. Once clicked it will be visible in your main panel as shown below. (refer to Figure 6)

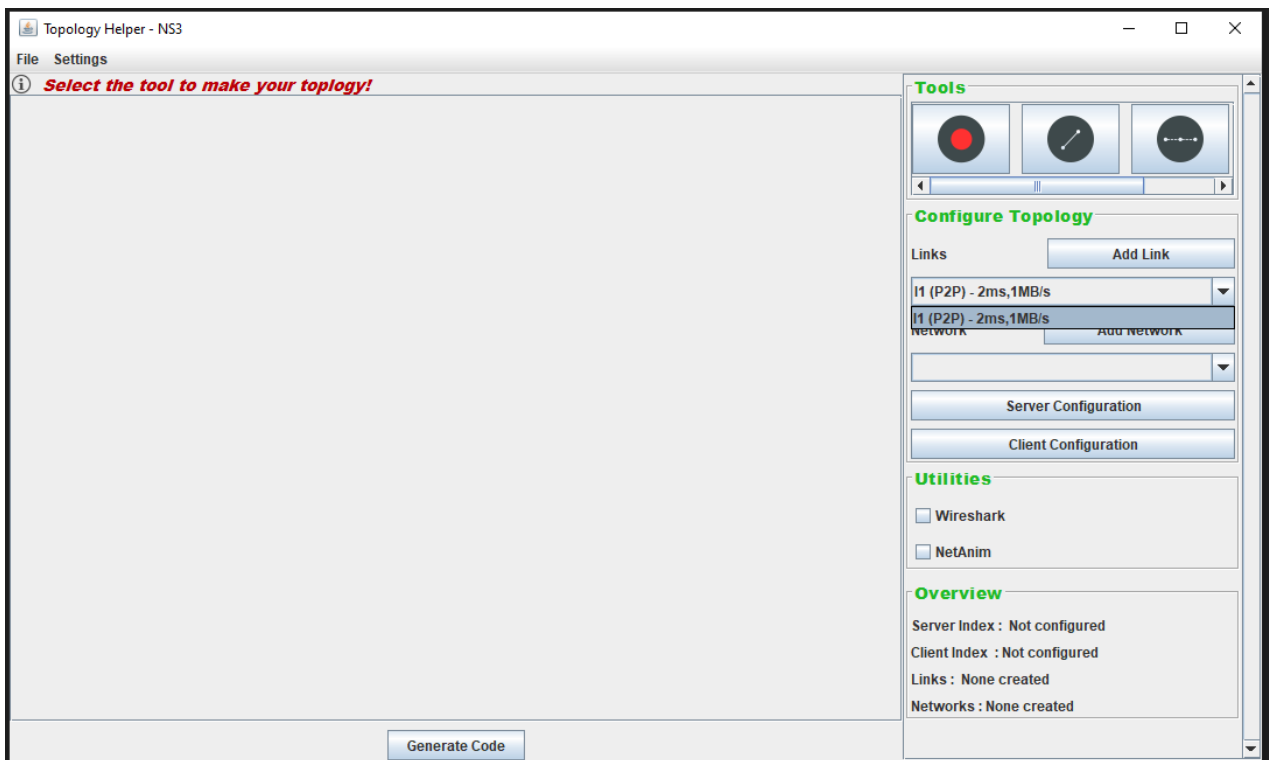


Figure 6 - Showing Default Links to Main panel

4.1.2.2 Managing Default Networks

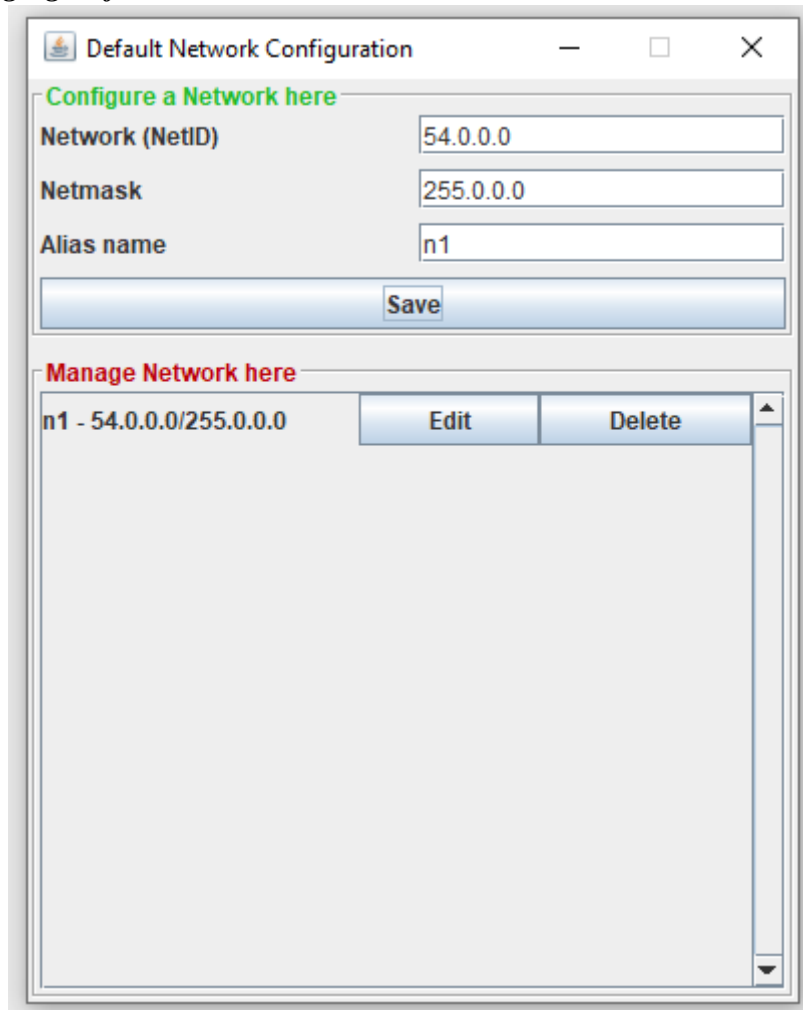


Figure 7 - Default Network Dialog Box

This dialog box (refer to Figure 7) facilitates the addition, editing, and deletion of default network along with their configurations. It allows you to add network settings that you use frequently, thereby saving time on repetitive configuration tasks. Other than that, the functionalities are same as above Dialog for Default Links (refer to section 4.1.2.1).

4.1.2.3 Managing Default Wi-Fi Link Configuration **(*NEW)**

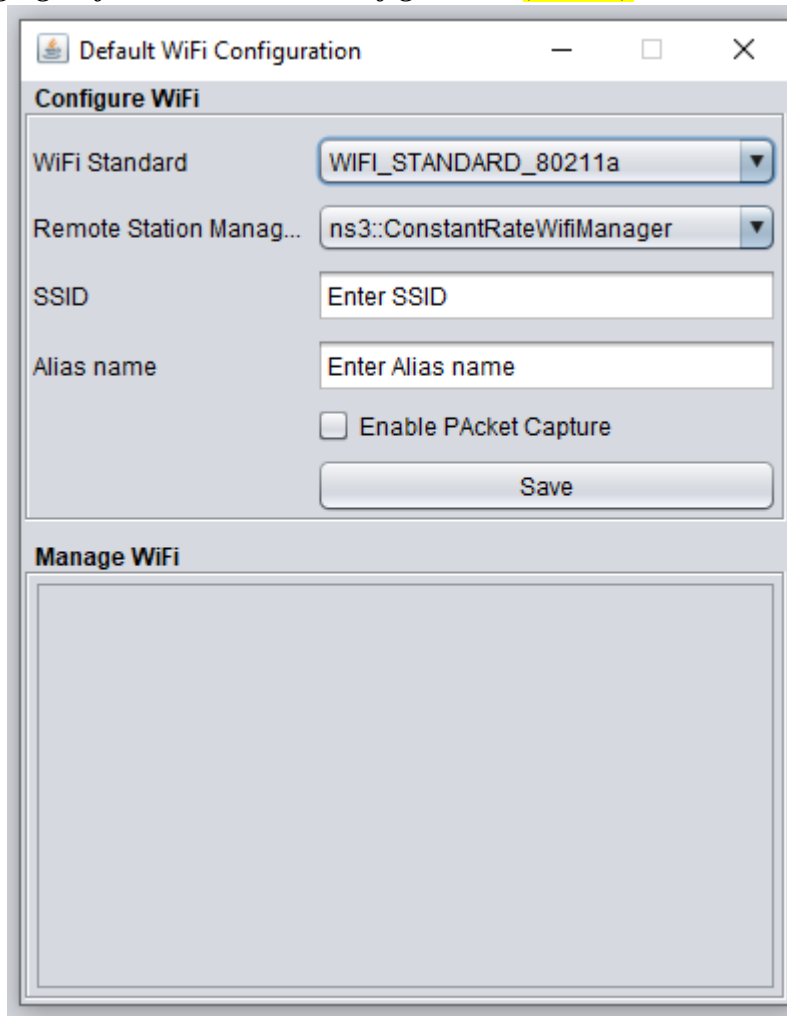


Figure 8 - Default Wi-Fi Link Configuration Dialog Box

This dialog box (refer to Figure 8) facilitates the addition, editing, and deletion of default wi-fi links along with their configurations. It allows you to add Wi-Fi links that you use frequently, thereby saving time on repetitive configuration tasks. Other than that, the functionalities are same as above Dialog for Default Links (refer to section 4.1.2.1).

4.2 EXPLORING THE LAYOUT

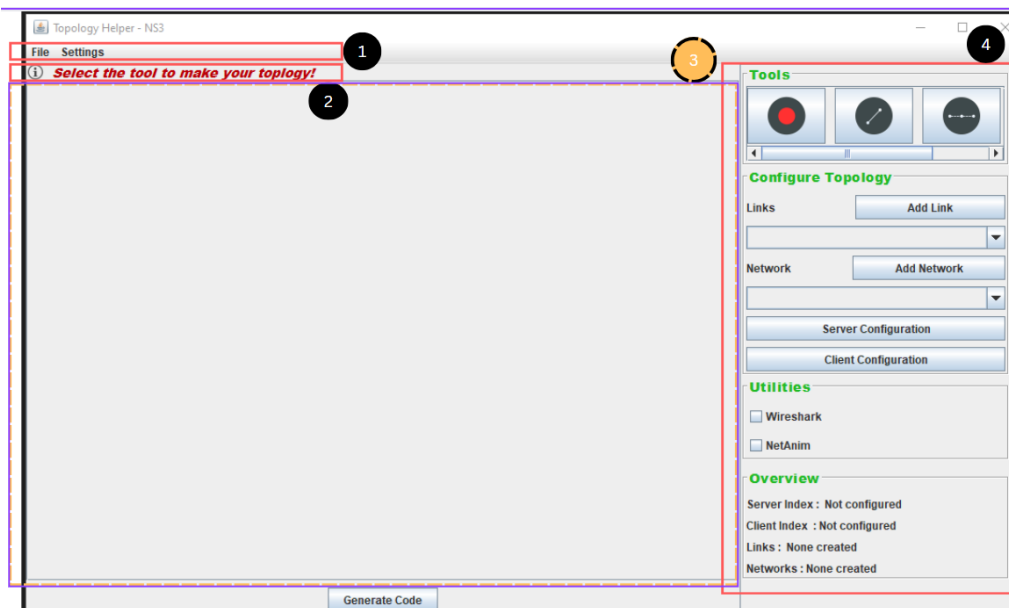


Figure 9 - Layout of the Application

The application is structured into four main components: the "menu bar" (see section 2.1), marked as label 1 in figure 8, the "information label" displaying details about the selected tool/utility (label 2 in figure 8), the "canvas area" where you create your topology (label 3 in figure 8), and the "main panel" (label 4 in figure 8), which houses various utilities and tools for topology creation.

4.3 EXPLORING THE MAIN PANEL

4.3.1 Exploring Tools Section

In this interface, you'll find a variety of tools available for selection. Choosing a tool triggers updates in the "information label," displaying relevant details about the selected tool. Feel free to select any tool; usage instructions are provided for each one. Hovering on each tool, pops up the name of the tool as a tool tip text.

4.3.1.1 Node Tool

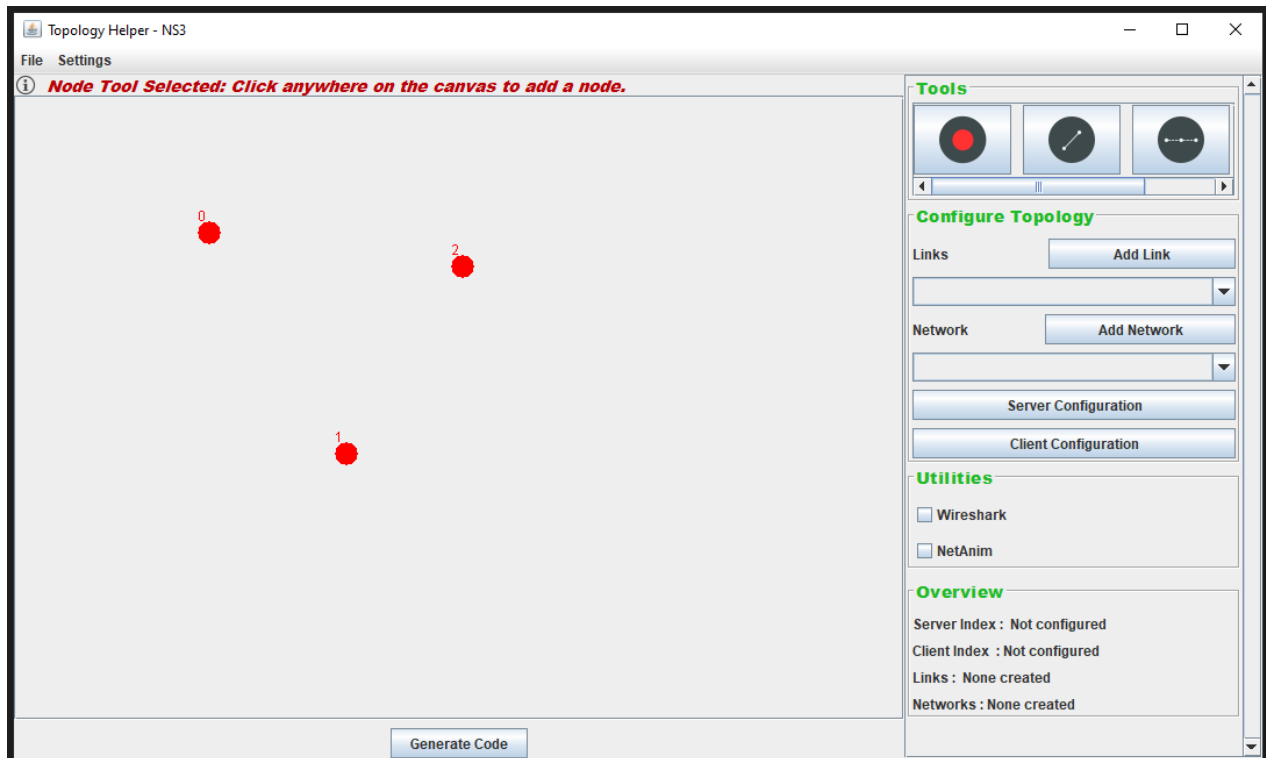


Figure 10 - Selection of node tool



Figure 11 - Icon of node tool

The node tool icon is visible (see figure 10). When you select this tool, you can add nodes to the canvas. These nodes represent the "NodeContainer" class from NS-3. Simply click anywhere on the canvas to add a node, which becomes part of your topology. Each node is assigned an index, displayed on top of the node in the GUI.

4.3.1.2 P2P Link Tool

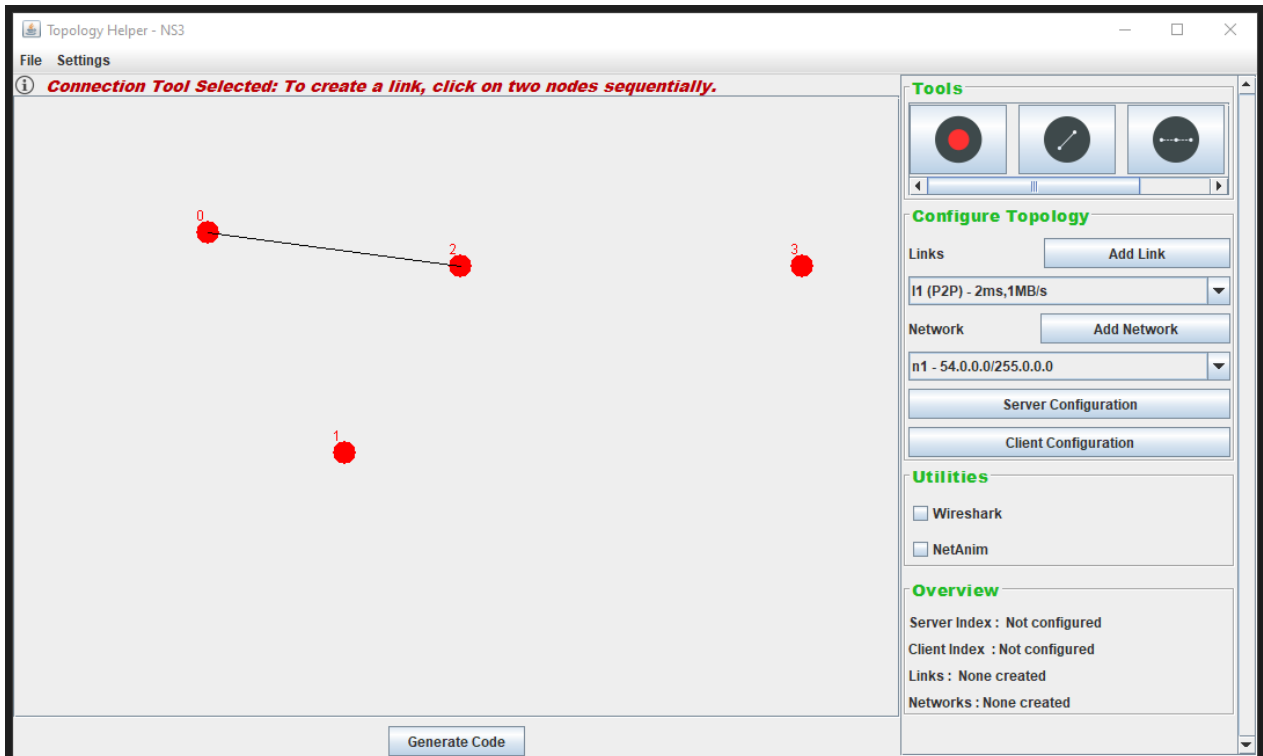


Figure 12 - selection of P2P Link Tool

The icon for the P2P Link Tool is displayed (see figure 12). Clicking on this tool will provide instructions on how to use it within the "information label." Essentially, you'll need to click on any two nodes sequentially to establish a P2P wired link between them. This action mirrors the creation of "NodeDevices" using "PointToPointHelper" in NS-3. After selecting the second node, a "Configure Connection" dialog box will prompt you (refer to figure 13), where you can specify the desired P2P Link and Network settings for configuring the devices.



Figure 13 - icon for P2P Link Tool

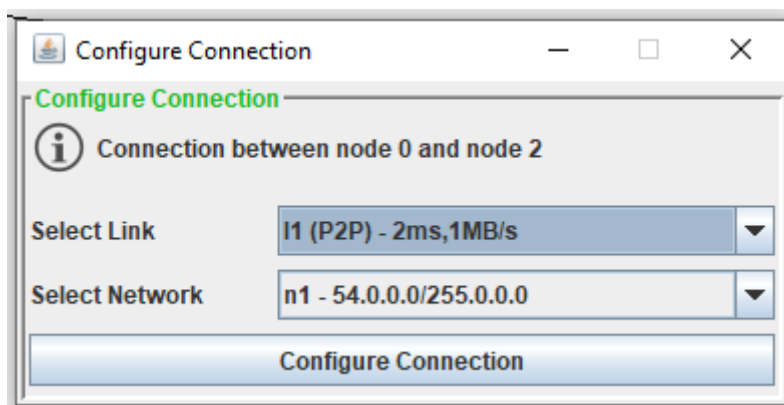


Figure 14 - Configure Connection Dialog Box

4.3.1.3 CSMA Link Tool

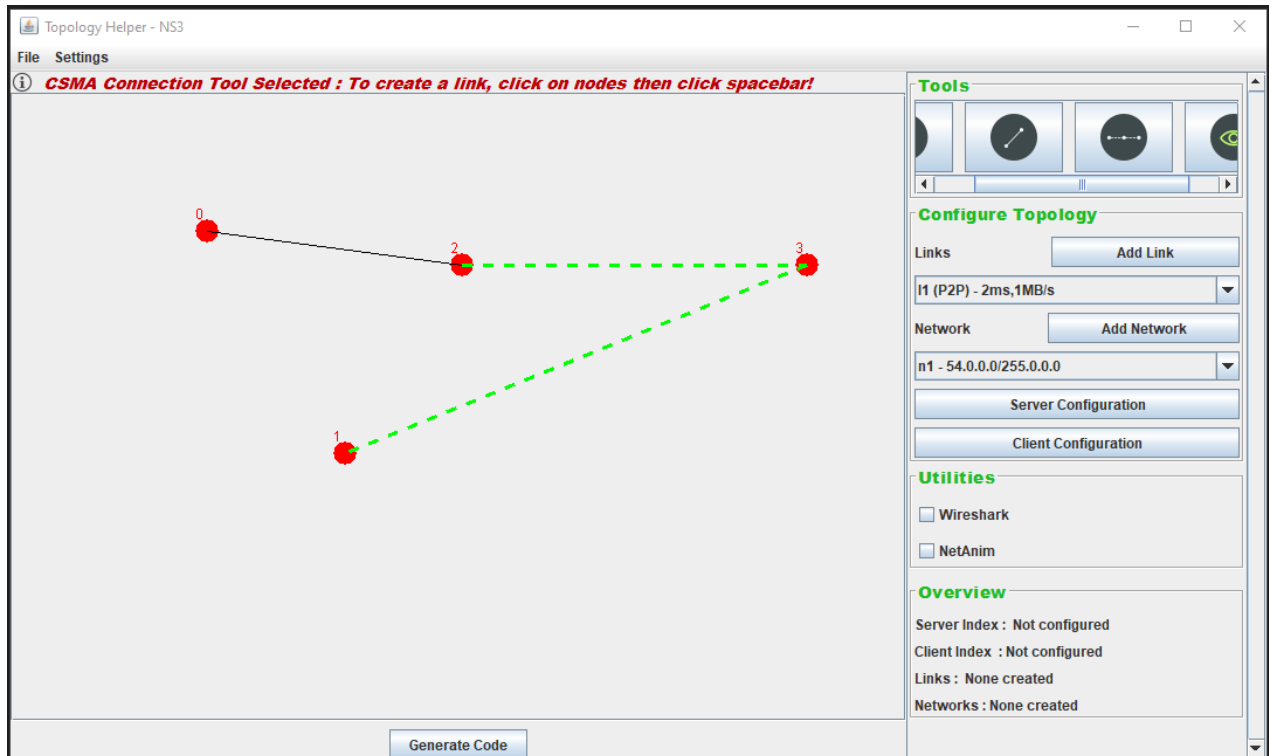


Figure 15 - Selection of CSMA Link Tool



Figure 16 - Icon for CSMA Link Tool

The procedure for adding a CSMA Link is quite similar to what we've seen for the "P2P Link" (refer to section 4.3.1.2). Similar to the CSMA Channel, which is a replication of the "CsmaHelper" from NS-3, it can accommodate more than two networking nodes in the same channel. You can click on the nodes you wish to include in the CSMA Channel and then press the "Space Bar" key on the keyboard to configure the connection. Upon pressing the "Space Bar" key, you'll encounter the same "Configure Connection" dialog box (refer to figure 14), allowing you to select the desired CSMA Link and Network Configuration. This configures "NodeDevices" using "CsmaHelper" from NS-3.

4.3.1.4 View Tool

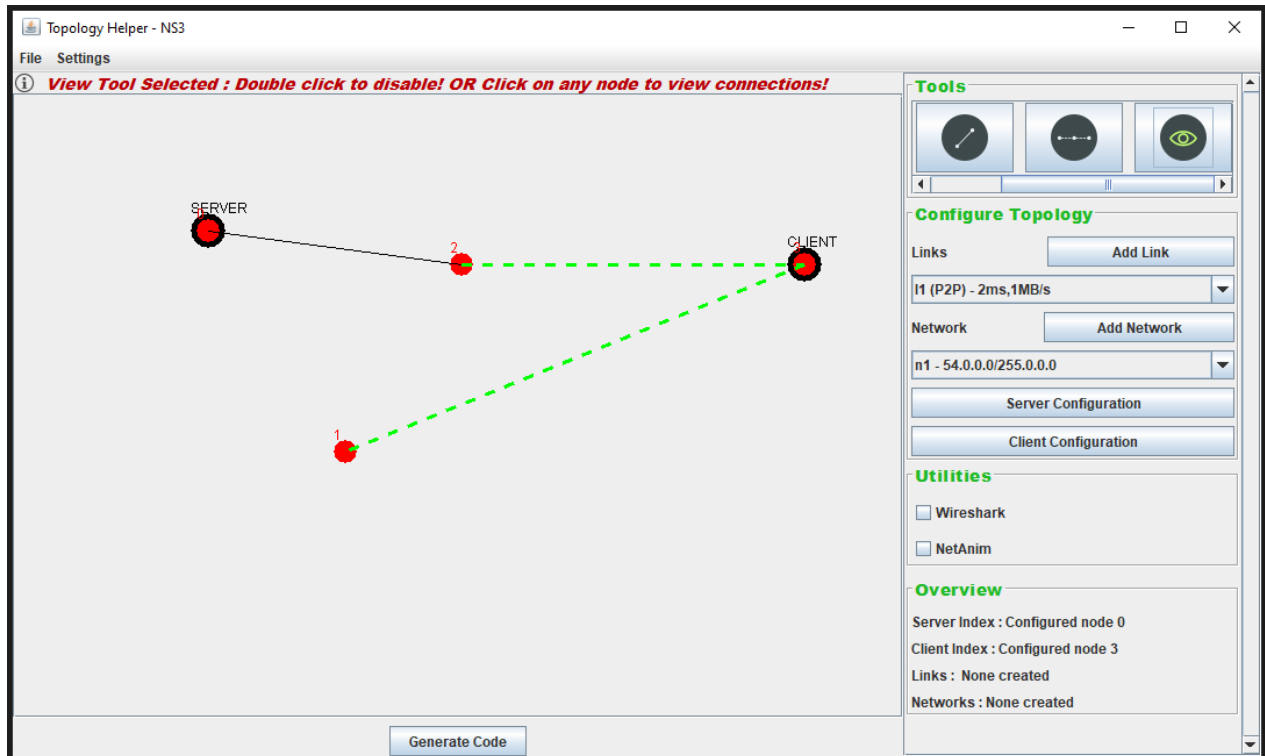


Figure 17 - Selection of View Tool

Once you've configured the Client and Server Nodes (refer to section 4.3.2.3 and 4.3.2.4), you can utilize the View Tool, which highlights these nodes (refer to figure 16). Double-clicking will deactivate the highlighting. Essentially, this tool serves as a utility for visualizing the topology. Although you can also view the client and server node indexes from the Overview tab, located within the main panel's last tab.



Figure 18 - Icon of view tool

4.3.1.5 Wi-Fi Connection Tool **(*NEW)**

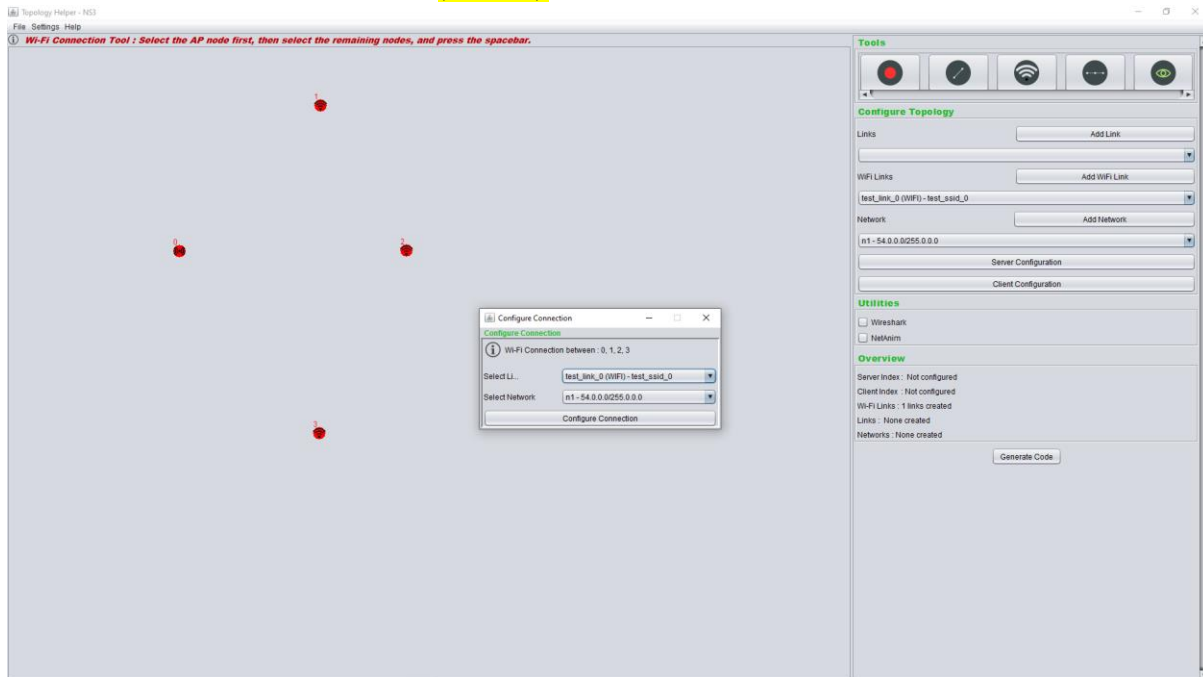


Figure 19 - Selection of Wi-Fi Connection Tool



Figure 20 - Icon of Wi-Fi Connection tool

The Wi-Fi connection tool is readily accessible (refer to figure 20). Upon selecting this tool, you can incorporate Wi-Fi NICs into nodes. It's important to note that you must first choose the AP node, followed by the remaining nodes for the single Wi-Fi channel. Once nodes are selected, pressing the space bar will prompt the opening of the Connection configuration dialog box, allowing configuration of "NetDevices" for the Wi-Fi channel from NS3. From there you can choose the Wi-Fi Link and Desired Network Configuration just as we have did for the "P2P Link Tool" (refer section 4.3.1.2) and "CSMA Link Tool" (refer section 4.3.1.3).

4.3.2 Exploring Configure Topology Section

This section or tab within the main panel provides options for adding links, network settings, configuring server, and configuring client. Currently, the feature set includes configuring one "UdpEchoClient" and one "UdpEchoServer."

However, we are planning to introduce an update soon that will allow the addition of multiple client servers and multiple applications.

4.3.2.1 Adding a network link

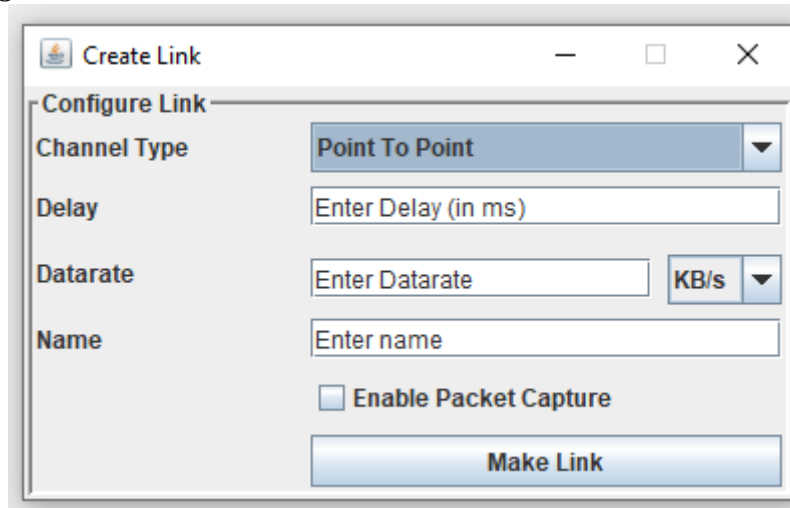


Figure 21 - Create Link Dialog Box

Clicking on the "Add Link" button in the Configure Topology tab of the main panel will open the "Create Link" dialog box (see figure 18). This dialog box allows you to establish a network link, which can be associated with the "PointToPointHelper" or "CsmaHelper" classes from NS-3. These helpers can be added using the tools discussed in section 2.3.1. Created links will be shown in the dropdown that is below the button which says "Add Link".

4.3.2.2 Adding a network

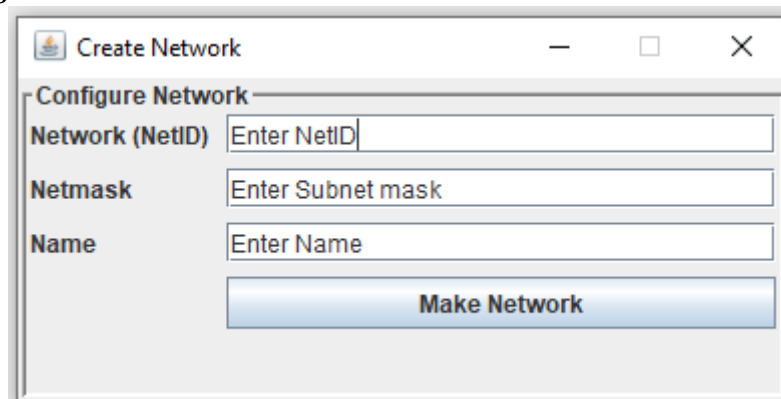


Figure 22 - Create a network dialog box

Clicking on the "Add Network" button allows you to add a network configuration that can be applied when configuring network devices using the tools discussed in section 2.3.1.

4.3.2.3 Server Configuration

Figure 23 - Server Configuration Dialog Box

Clicking on the "Server Configuration" button will open the Server Configuration Dialog Box, enabling you to create a single UdpEchoServer with minimal configuration settings.

This section will be changed in next releases, allowing you to add multiple servers with the particular type of server that you want.

4.3.2.4 Client Configuration

Figure 24 - Client Configuration Dialog Box

By clicking on the "Client Configuration" button, you will be presented with the Client Configuration Dialog Box. From there, you can create a single UdpEchoClient with ease.

This section will be changed in next releases, allowing you to add multiple servers with the particular type of client that you want.

4.3.3 Exploring the Utilities

The term "utilities" in NS-3 encompasses various tools designed to extract useful insights from simulations, such as visualization tools or data collection mechanisms like NetAnim, WireShark, and Trace Sources. Presently, our focus lies on NetAnim and Wireshark, both of which are elaborated upon below.

This section will be changed in upcoming releases, allowing you to configure more utilities with various configuration settings.

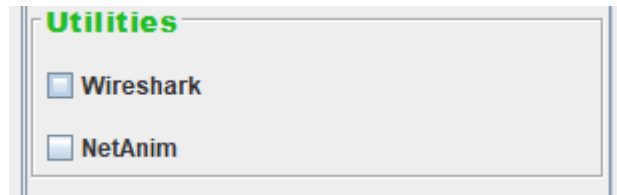


Figure 25 - Utility Section from the Main Panel

4.3.3.1 NetAnim Utility

In the Utility tab of the Main Panel, you will find a checkbox (see figure 22) that facilitates the generation of ".xml" files. Although there are additional server configurations possible, such as node positioning and attaching mobility modules for NetAnim visualization, these options are not currently available via the GUI. Our focus for this release is limited to specific features, with plans to expand in future updates.

This section will be changed in later releases, allowing you to set several configurations for the visualization in NetAnim.

4.3.3.2 WireShark Utility

Within the WireShark Utility section, you'll find a checkbox (see figure 22) that, when enabled, initiates packet capture. While there are various configuration possibilities, including selective node capture and time periods, our current focus is streamlined. Packet capture is currently enabled for the entire link, akin to the ".EnablePcapAll()" function, as we've confined our scope for this release.

This section will be changed in later releases, allowing you to set several configurations for the Data collection in Wireshark.

4.3.4 Exploring Overview Tab

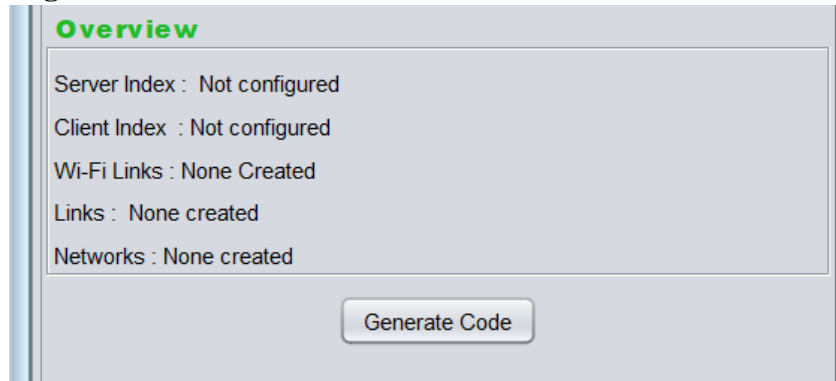


Figure 26 - Overview tab from the Main Panel

You can access an overview of the current topology from the Overview tab. This section displays essential information such as server index, client index, the number of created links, the number of networks created, and more.